

# LM613 Dual Operational Amplifiers, Dual Comparators, and Adjustable Reference

## General Description

The LM613 consists of dual op-amps, dual comparators, and a programmable voltage reference in a 16-pin package. The op-amps out-performs most single-supply op-amps by providing higher speed and bandwidth along with low supply current. This device was specifically designed to lower cost and board space requirements in transducer, test, measurement, and data acquisition systems.

Combining a stable voltage reference with wide output swing op-amps makes the LM613 ideal for single supply transducers, signal conditioning and bridge driving where large common-mode-signals are common. The voltage reference consists of a reliable band-gap design that maintains low dynamic output impedance ( $1\Omega$  typical), excellent initial tolerance (0.6%), and the ability to be programmed from 1.2V to 6.3V via two external resistors. The voltage reference is very stable even when driving large capacitive loads, as are commonly encountered in CMOS data acquisition systems.

As a member of National's Super-Block™ family, the LM613 is a space-saving monolithic alternative to a multi-chip solution, offering a high level of integration without sacrificing performance.

## Features

### OP AMP

- Low operating current (Op Amp) 300  $\mu$ A
- Wide supply voltage range 4V to 36V
- Wide common-mode range  $V^-$  to  $(V^+ - 1.8V)$
- Wide differential input voltage  $\pm 36V$
- Available in plastic package rated for Military Temp. Range Operation

### REFERENCE



- Adjustable output voltage 1.2V to 6.3V
- Tight initial tolerance available  $\pm 0.6\%$
- Wide operating current range 17  $\mu$ A to 20 mA
- Tolerant of load capacitance

## Applications

- Transducer bridge driver
- Process and mass flow control systems
- Power supply voltage monitor
- Buffered voltage references for A/D's

Super-Block™ is a trademark of National Semiconductor Corporation.

## Connection Diagrams

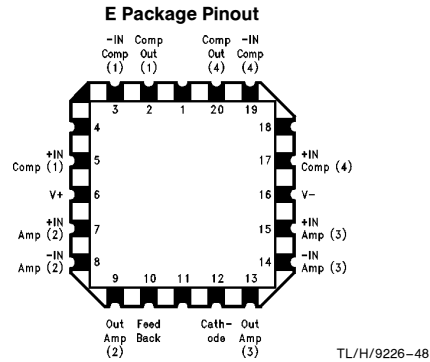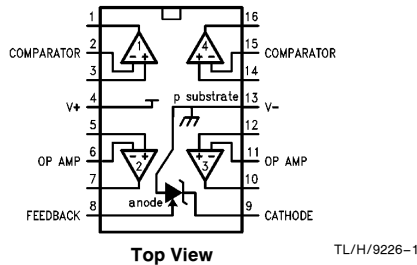

## Ordering Information

Reference Tolerance & $V_{OS}$	Temperature Range			Package	NSC Drawing
	Military $-55^{\circ}C \leq T_A \leq +125^{\circ}C$	Industrial $-40^{\circ}C \leq T_A \leq +85^{\circ}C$	Commercial $0^{\circ}C \leq T_A \leq +70^{\circ}C$		
$\pm 0.6\%$ 80 ppm/ $^{\circ}C$ Max. $V_{OS} \leq 3.5$ mV	LM613AMN	LM613AIN	—	16-Pin Molded DIP	N16E
	LM613AMJ/883 (Note 14)	—	—	16-Pin Ceramic DIP	J16A
	LM613AME/883 (Note 14)	—	—	20-Pin LCC	E20A
$\pm 2.0\%$ 150 ppm/ $^{\circ}C$ Max. $V_{OS} \leq 5.0$ mV Max.	LM613MN	LM613IN	LM613CN	16-Pin Molded DIP	N16E
	—	LM613IWM	—	16-Pin Wide Surface Mount	M16B

## Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Voltage on Any Pin Except $V_R$ (referred to $V^-$ pin)	
(Note 2)	36V (Max)
(Note 3)	-0.3V (Min)
Current through Any Input Pin & $V_R$ Pin	$\pm 20$ mA
Differential Input Voltage	
Military and Industrial	$\pm 36$ V
Commercial	$\pm 32$ V
Storage Temperature Range	$-65^\circ\text{C} \leq T_J \leq +150^\circ\text{C}$
Maximum Junction Temperature (Note 4)	150°C

Thermal Resistance, Junction-to-Ambient (Note 5)	
N Package	100°C/W
WM Package	150°C/W

Soldering Information (10 Seconds)	
N Package	260°C
WM Package	220°C

ESD Tolerance (Note 6)	$\pm 1$ kV
------------------------	------------

## Operating Temperature Range

LM613AI, LM613BI	$-40^\circ\text{C}$ to $+85^\circ\text{C}$
LM613AM, LM613M	$-55^\circ\text{C}$ to $+125^\circ\text{C}$
LM613C	$0^\circ\text{C} \leq T_J \leq +70^\circ\text{C}$

**Electrical Characteristics** These specifications apply for  $V^- = \text{GND} = 0\text{V}$ ,  $V^+ = 5\text{V}$ ,  $V_{\text{CM}} = V_{\text{OUT}} = 2.5\text{V}$ ,  $I_R = 100 \mu\text{A}$ , FEEDBACK pin shorted to GND, unless otherwise specified. Limits in standard typeface are for  $T_J = 25^\circ\text{C}$ ; limits in **bold type** apply over the **Operating Temperature Range**.

Symbol	Parameter	Conditions	Typical (Note 7)	LM613AM LM613AI Limits (Note 8)	LM613M LM613I LM613C Limits (Note 8)	Units
$I_S$	Total Supply Current	$R_{\text{LOAD}} = \infty$ , $4\text{V} \leq V^+ \leq 36\text{V}$ (32V for LM613C)	450 <b>550</b>	940 <b>1000</b>	1000 <b>1070</b>	$\mu\text{A}$ (Max) $\mu\text{A}$ (Max)
$V_S$	Supply Voltage Range		2.2 <b>2.9</b>	2.8 <b>3</b>	2.8 <b>3</b>	V (Min) V (Min)
			46 <b>43</b>	36 <b>36</b>	32 <b>32</b>	V (Max) V (Max)

## OPERATIONAL AMPLIFIERS

$V_{\text{OS1}}$	$V_{\text{OS}}$ Over Supply	$4\text{V} \leq V^+ \leq 36\text{V}$ ( $4\text{V} \leq V^+ \leq 32\text{V}$ for LM613C)	1.5 <b>2.0</b>	3.5 <b>6.0</b>	5.0 <b>7.0</b>	mV (Max) mV (Max)
$V_{\text{OS2}}$	$V_{\text{OS}}$ Over $V_{\text{CM}}$	$V_{\text{CM}} = 0\text{V}$ through $V_{\text{CM}} =$ ( $V^+ - 1.8\text{V}$ ), $V^+ = 30\text{V}$ , $V^- = 0\text{V}$	1.0 <b>1.5</b>	3.5 <b>6.0</b>	5.0 <b>7.0</b>	mV (Max) mV (Max)
$\frac{V_{\text{OS3}}}{\Delta T}$	Average $V_{\text{OS}}$ Drift	(Note 8)	<b>15</b>			$\mu\text{V}/^\circ\text{C}$ (Max)
$I_B$	Input Bias Current		10 <b>11</b>	25 <b>30</b>	35 <b>40</b>	nA (Max) nA (Max)
$I_{\text{OS}}$	Input Offset Current		0.2 <b>0.3</b>	4 <b>5</b>	4 <b>5</b>	nA (Max) nA (Max)
$\frac{I_{\text{OS1}}}{\Delta T}$	Average Offset Current		<b>4</b>			pA/ $^\circ\text{C}$
$R_{\text{IN}}$	Input Resistance	Differential	1000			M $\Omega$
$C_{\text{IN}}$	Input Capacitance	Common-Mode	6			pF
$e_n$	Voltage Noise	$f = 100$ Hz, Input Referred	74			nV/ $\sqrt{\text{Hz}}$
$I_n$	Current Noise	$f = 100$ Hz, Input Referred	58			fA/ $\sqrt{\text{Hz}}$
CMRR	Common-Mode Rejection Ratio	$V^+ = 30\text{V}$ , $0\text{V} \leq V_{\text{CM}} \leq (V^+ - 1.8\text{V})$ CMRR = $20 \log (\Delta V_{\text{CM}}/\Delta V_{\text{OS}})$	95 <b>90</b>	80 <b>75</b>	75 <b>70</b>	dB (Min) dB (Min)
PSRR	Power Supply Rejection Ratio	$4\text{V} \leq V^+ \leq 30\text{V}$ , $V_{\text{CM}} = V^+/2$ , PSRR = $20 \log (\Delta V^+/V_{\text{OS}})$	110 <b>100</b>	80 <b>75</b>	75 <b>70</b>	dB (Min) dB (Min)
$A_V$	Open Loop Voltage Gain	$R_L = 10$ k $\Omega$ to GND, $V^+ = 30\text{V}$ , $5\text{V} \leq V_{\text{OUT}} \leq 25\text{V}$	500 <b>50</b>	100 <b>40</b>	94 <b>40</b>	V/mV (Min)

**Electrical Characteristics** These specifications apply for  $V^- = \text{GND} = 0\text{V}$ ,  $V^+ = 5\text{V}$ ,  $V_{\text{CM}} = V_{\text{OUT}} = 2.5\text{V}$ ,  $I_{\text{R}} = 100\ \mu\text{A}$ , FEEDBACK pin shorted to GND, unless otherwise specified. Limits in standard typeface are for  $T_{\text{J}} = 25^\circ\text{C}$ ; limits in **boldface type** apply over **Operating Temperature Range**. (Continued)

Symbol	Parameter	Conditions	Typical (Note 7)	LM613AM LM613AI Limits (Note 8)	LM613M LM613I LM613C Limits (Note 8)	Units
<b>OPERATIONAL AMPLIFIERS</b> (Continued)						
SR	Slew Rate	$V^+ = 30\text{V}$ (Note 9)	0.70 <b>0.65</b>	0.55 <b>0.45</b>	0.50 <b>0.45</b>	V/ $\mu\text{s}$
GBW	Gain Bandwidth	$C_{\text{L}} = 50\ \text{pF}$	0.8 <b>0.5</b>			MHz MHz
$V_{\text{O1}}$	Output Voltage Swing High	$R_{\text{L}} = 10\ \text{k}\Omega$ to GND, $V^+ = 36\text{V}$ (32V for LM613C)	$V^+ - 1.4$ <b><math>V^+ - 1.6</math></b>	$V^+ - 1.7$ <b><math>V^+ - 1.9</math></b>	$V^+ - 1.8$ <b><math>V^+ - 1.9</math></b>	V (Min) V (Min)
$V_{\text{O2}}$	Output Voltage Swing Low	$R_{\text{L}} = 10\ \text{k}\Omega$ to $V^+$ , $V^+ = 36\text{V}$ (32V for LM613C)	$V^- + 0.8$ <b><math>V^- + 0.9</math></b>	$V^- + 0.9$ <b><math>V^- + 1.0</math></b>	$V^- + 0.95$ <b><math>V^- + 1.0</math></b>	V (Max) V (Max)
$I_{\text{OUT}}$	Output Source Current	$V_{\text{OUT}} = 2.5\text{V}$ , $V^+_{\text{IN}} = 0\text{V}$ , $V^-_{\text{IN}} = -0.3\text{V}$	25 <b>15</b>	20 <b>13</b>	16 <b>13</b>	mA (Min) mA (Min)
$I_{\text{SINK}}$	Output Sink Current	$V_{\text{OUT}} = 1.6\text{V}$ , $V^+_{\text{IN}} = 0\text{V}$ , $V^-_{\text{IN}} = 0.3\text{V}$	17 <b>9</b>	14 <b>8</b>	13 <b>8</b>	mA (Min) mA (Min)
$I_{\text{SHORT}}$	Short Circuit Current	$V_{\text{OUT}} = 0\text{V}$ , $V^+_{\text{IN}} = 3\text{V}$ , $V^-_{\text{IN}} = 2\text{V}$	30 <b>40</b>	50 <b>60</b>	50 <b>60</b>	mA (Max) mA (Max)
		$V_{\text{OUT}} = 5\text{V}$ , $V^+_{\text{IN}} = 2\text{V}$ , $V^-_{\text{IN}} = 3\text{V}$	30 <b>32</b>	60 <b>80</b>	70 <b>90</b>	mA (Max) mA (Max)
<b>COMPARATORS</b>						
$V_{\text{OS}}$	Offset Voltage	$4\text{V} \leq V^+ \leq 36\text{V}$ (32V for LM613C), $R_{\text{L}} = 15\ \text{k}\Omega$	1.0 <b>2.0</b>	3.0 <b>6.0</b>	5.0 <b>7.0</b>	mV (Max) mV (Max)
$\frac{V_{\text{OS}}}{V_{\text{CM}}}$	Offset Voltage over $V_{\text{CM}}$	$0\text{V} \leq V_{\text{CM}} \leq 36\text{V}$ $V^+ = 36\text{V}$ , (32V for LM613C)	1.0 <b>1.5</b>	3.0 <b>6.0</b>	5.0 <b>7.0</b>	mV (Max) mV (Max)
$\frac{V_{\text{OS}}}{\Delta T}$	Average Offset Voltage Drift		<b>15</b>			$\mu\text{V}/^\circ\text{C}$ (Max)
$I_{\text{B}}$	Input Bias Current		5 <b>8</b>	25 <b>30</b>	35 <b>40</b>	nA (Max) nA (Max)
$I_{\text{OS}}$	Input Offset Current		0.2 <b>0.3</b>	4 <b>5</b>	4 <b>5</b>	nA (Max) nA (Max)
$A_{\text{V}}$	Voltage Gain	$R_{\text{L}} = 10\ \text{k}\Omega$ to 36V (32V for LM613C) $2\text{V} \leq V_{\text{OUT}} \leq 27\text{V}$	500 <b>100</b>			V/mV V/mV
$t_{\text{r}}$	Large Signal Response Time	$V^+_{\text{IN}} = 1.4\text{V}$ , $V^-_{\text{IN}} = \text{TTL Swing}$ , $R_{\text{L}} = 5.1\ \text{k}\Omega$	1.5 <b>2.0</b>			$\mu\text{s}$ $\mu\text{s}$
$I_{\text{SINK}}$	Output Sink Current	$V^+_{\text{IN}} = 0\text{V}$ , $V^-_{\text{IN}} = 1\text{V}$ , $V_{\text{OUT}} = 1.5\text{V}$	20 <b>13</b>	10 <b>8</b>	10 <b>8</b>	mA (Min) mA (Min)
		$V_{\text{OUT}} = 0.4\text{V}$	2.8 <b>2.4</b>	1.0 <b>0.5</b>	0.8 <b>0.5</b>	mA (Min) mA (Min)
$I_{\text{LEAK}}$	Output Leakage Current	$V^+_{\text{IN}} = 1\text{V}$ , $V^-_{\text{IN}} = 0\text{V}$ , $V_{\text{OUT}} = 36\text{V}$ (32V for LM613C)	0.1 <b>0.2</b>	10	10	$\mu\text{A}$ (Max) $\mu\text{A}$ (Max)

**Electrical Characteristics** These specifications apply for  $V^- = \text{GND} = 0\text{V}$ ,  $V^+ = 5\text{V}$ ,  $V_{\text{CM}} = V_{\text{OUT}} = 2.5\text{V}$ ,  $I_{\text{R}} = 100\ \mu\text{A}$ , FEEDBACK pin shorted to GND, unless otherwise specified. Limits in standard typeface are for  $T_{\text{J}} = 25^\circ\text{C}$ ; limits in **boldface type** apply over **Operating Temperature Range**. (Continued)

Symbol	Parameter	Conditions	Typical (Note 7)	LM613AM LM613AI Limits (Note 8)	LM613M LM613I LM613C Limits (Note 8)	Units
<b>VOLTAGE REFERENCE</b>						
$V_{\text{R}}$	Voltage Reference	(Note 10)	1.244	1.2365 1.2515 ( $\pm 0.6\%$ )	1.2191 1.2689 ( $\pm 2\%$ )	V (Min) V (Max)
$\frac{\Delta V_{\text{R}}}{\Delta T}$	Average Temp. Drift	(Note 11)	<b>10</b>	<b>80</b>	<b>150</b>	ppm/ $^\circ\text{C}$ (Max)
$\frac{\Delta V_{\text{R}}}{\Delta T_{\text{J}}}$	Hysteresis	(Note 12)	<b>3.2</b>			$\mu\text{V}/^\circ\text{C}$
$\frac{\Delta V_{\text{R}}}{\Delta I_{\text{R}}}$	$V_{\text{R}}$ Change with Current	$V_{\text{R}}(100\ \mu\text{A}) - V_{\text{R}}(17\ \mu\text{A})$	0.05 <b>0.1</b>	1 <b>1.1</b>	1 <b>1.1</b>	mV (Max) mV (Max)
		$V_{\text{R}}(10\ \text{mA}) - V_{\text{R}}(100\ \mu\text{A})$ (Note 13)	1.5 <b>2.0</b>	5 <b>5.5</b>	5 <b>5.5</b>	mV (Max) mV (Max)
R	Resistance	$\Delta V_{\text{R}}(10 \rightarrow 0.1\ \text{mA})/9.9\ \text{mA}$ $\Delta V_{\text{R}}(100 \rightarrow 17\ \mu\text{A})/83\ \mu\text{A}$	<b>0.2</b> <b>0.6</b>	<b>0.56</b> <b>13</b>	<b>0.56</b> <b>13</b>	$\Omega$ (Max) $\Omega$ (Max)
$\frac{V_{\text{R}}}{\Delta V_{\text{RO}}}$	$V_{\text{R}}$ Change with High $V_{\text{RO}}$	$V_{\text{R}}(V_{\text{RO}} = V_{\text{r}}) - V_{\text{R}}(V_{\text{RO}} = 6.3\text{V})$ (5.06V between Anode and FEEDBACK)	2.5 <b>2.8</b>	7 <b>10</b>	7 <b>10</b>	mV (Max) mV (Max)
$\frac{V_{\text{R}}}{\Delta V^+}$	$V_{\text{R}}$ Change with $V_{\text{ANODE}}$ Change	$V_{\text{R}}(V^+ = 5\text{V}) - V_{\text{R}}(V^+ = 36\text{V})$ ( $V^+ = 32\text{V}$ for LM613C)	0.1 <b>0.1</b>	1.2 <b>1.3</b>	1.2 <b>1.3</b>	mV (Max) mV (Max)
		$V_{\text{R}}(V^+ = 5\text{V}) - V_{\text{R}}(V^+ = 3\text{V})$	0.01 <b>0.01</b>	1 <b>1.5</b>	1 <b>1.5</b>	mV (Max) mV (Max)
$I_{\text{FB}}$	FEEDBACK Bias Current	$V_{\text{ANODE}} \leq V_{\text{FB}} \leq 5.06\text{V}$	22 <b>29</b>	35 <b>40</b>	50 <b>55</b>	nA (Max) nA (Max)
$e_{\text{n}}$	$V_{\text{R}}$ Noise	10 Hz to 10 kHz, $V_{\text{RO}} = V_{\text{R}}$	30			$\mu\text{V}_{\text{RMS}}$

**Note 1:** Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device beyond its rated operating conditions.

**Note 2:** Input voltage above  $V^+$  is allowed. As long as one input pin voltage remains inside the common-mode range, the comparator will deliver the correct output.

**Note 3:** More accurately, it is excessive current flow, with resulting excess heating, that limits the voltages on all pins. When any pin is pulled a diode drop below  $V^-$ , a parasitic NPN transistor turns ON. No latch-up will occur as long as the current through that pin remains below the Maximum Rating. Operation is undefined and unpredictable when any parasitic diode or transistor is conducting.

**Note 4:** Simultaneous short-circuit of multiple comparators while using high supply voltages may force junction temperature above maximum, and thus should not be continuous.

**Note 5:** Junction temperature may be calculated using  $T_{\text{J}} = T_{\text{A}} + P_{\text{D}} \theta_{\text{JA}}$ . The given thermal resistance is worst-case for packages in sockets in still air. For packages soldered to copper-clad board with dissipation from one comparator or reference output transistor, nominal  $\theta_{\text{JA}}$  is  $90^\circ\text{C}/\text{W}$  for the N package, and  $135^\circ\text{C}/\text{W}$  for the WM package.

**Note 6:** Human body model, 100 pF discharged through a 1.5 k $\Omega$  resistor.

**Note 7:** Typical values in standard typeface are for  $T_{\text{J}} = 25^\circ\text{C}$ ; values in **bold face type** apply for the full operating temperature range. These values represent the most likely parametric norm.

**Note 8:** All limits are guaranteed at room temperature (standard type face) or at operating temperature extremes (**bold type face**).

**Note 9:** Slew rate is measured with the op amp in a voltage follower configuration. For rising slew rate, the input voltage is driven from 5V to 25V, and the output voltage transition is sampled at 10V and @ 20V. For falling slew rate, the input voltage is driven from 25V to 5V, and the output voltage transition is sampled at 20V and 10V.

**Note 10:**  $V_{\text{R}}$  is the Cathode-to-feedback voltage, nominally 1.244V.


**Note 11:** Average reference drift is calculated from the measurement of the reference voltage at  $25^\circ\text{C}$  and at the temperature extremes. The drift, in ppm/ $^\circ\text{C}$ , is  $10^6 \cdot \Delta V_{\text{R}} / (V_{\text{R}[25^\circ\text{C}]} \cdot \Delta T_{\text{J}})$ , where  $\Delta V_{\text{R}}$  is the lowest value subtracted from the highest,  $V_{\text{R}[25^\circ\text{C}]}$  is the value at  $25^\circ\text{C}$ , and  $\Delta T_{\text{J}}$  is the temperature range. This parameter is guaranteed by design and sample testing.

**Note 12:** Hysteresis is the change in  $V_{\text{R}}$  caused by a change in  $T_{\text{J}}$ , after the reference has been "dehysteresized". To dehysteresize the reference; that is minimize the hysteresis to the typical value, its junction temperature should be cycled in the following pattern, spiraling in toward  $25^\circ\text{C}$ :  $25^\circ\text{C}$ ,  $85^\circ\text{C}$ ,  $-40^\circ\text{C}$ ,  $70^\circ\text{C}$ ,  $0^\circ\text{C}$ ,  $25^\circ\text{C}$ .


**Note 13:** Low contact resistance is required for accurate measurement.

**Note 14:** A military RETS 613AMX electrical test specification is available on request. The Military screened parts can also be procured as a Standard Military Drawing.


## Simplified Schematic Diagrams

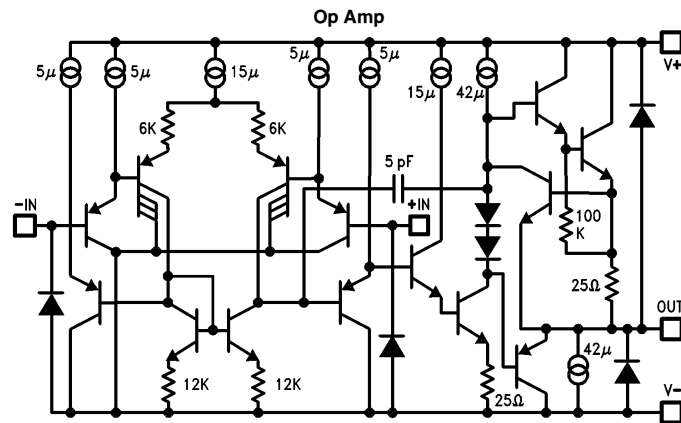

TL/H/9226-2

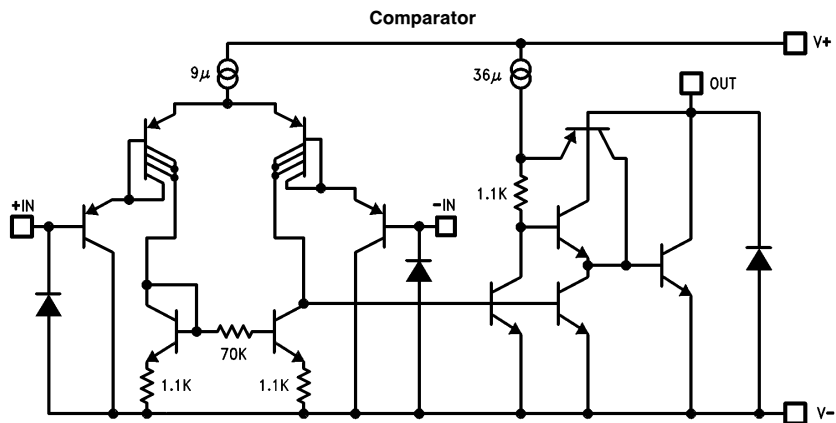













TL/H/9226-3

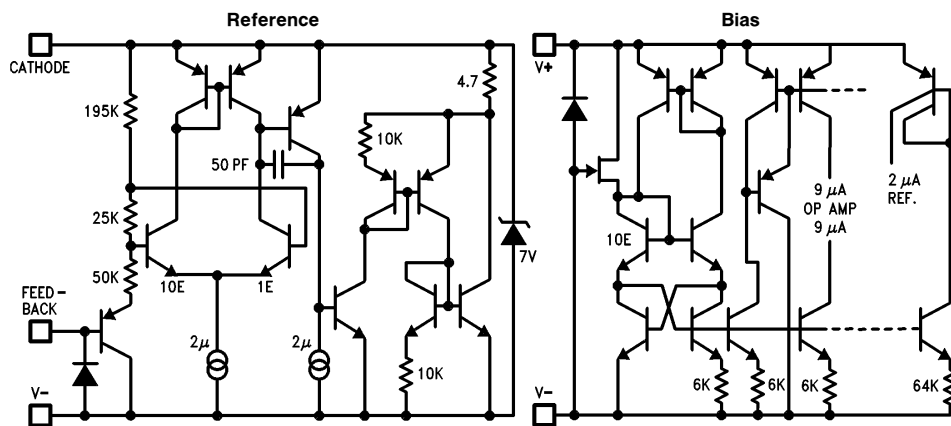

TL/H/9226-4

# Typical Performance Characteristics (Reference)

$T_J = 25^\circ\text{C}$ , FEEDBACK pin shorted to  $V^- = 0\text{V}$ , unless otherwise noted




TL/H/9226-5


## Typical Performance Characteristics (Reference) (Continued)

$T_J = 25^\circ\text{C}$ , FEEDBACK pin shorted to  $V^- = 0\text{V}$ , unless otherwise noted


**Reference Power-Up Time**

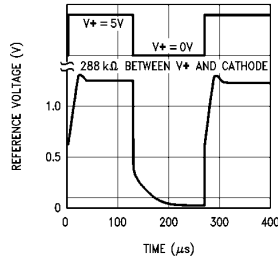


**Reference Voltage with FEEDBACK Voltage Step**




**Reference Voltage with 100 ~ 12  $\mu\text{A}$  Current Step**




**Reference Step Response for 100  $\mu\text{A}$  ~ 10 mA Current Step**



**Reference Voltage Change with Supply Voltage Step**



**Reference Change vs Common-Mode Voltage**




TL/H/9226-6


## Typical Performance Characteristics (Op Amps)

$V^+ = 5\text{V}$ ,  $V^- = \text{GND} = 0\text{V}$ ,  $V_{CM} = V^+ / 2$ ,  $V_{OUT} = V^+ / 2$ ,  $T_J = 25^\circ\text{C}$ , unless otherwise noted


**Input Common-Mode Voltage Range vs Temperature**




**$V_{OS}$  vs Junction Temperature**




**Input Bias Current vs Common-Mode Voltage**



**Large-Signal Step Response**



**Output Voltage Swing vs Temp. and Current**




TL/H/9226-7


# Typical Performance Characteristics (Op Amps) (Continued)

$V^+ = 5V$ ,  $V^- = GND = 0V$ ,  $V_{CM} = V^+/2$ ,  $V_{OUT} = V^+/2$ ,  $T_J = 25^\circ C$ , unless otherwise noted


**Output Source Current vs Output Voltage and Temp.**




**Output Sink Current vs Output Voltage**




**Output Swing, Large Signal**




**Output Impedance vs Frequency and Gain**




**Small Signal Pulse Response vs Temp.**




**Small-Signal Pulse Response vs Load**




**Op Amp Voltage Noise vs Frequency**




**Op Amp Current Noise vs Frequency**




**Small-Signal Voltage Gain vs Frequency and Temperature**




**Small-Signal Voltage Gain vs Frequency and Load**



**Follower Small-Signal Frequency Response**



**Common-Mode Input Voltage Rejection Ratio**









TL/H/9226-8




## Typical Performance Characteristics (Op Amps) (Continued)

$V^+ = 5V$ ,  $V^- = GND = 0V$ ,  $V_{CM} = V^+/2$ ,  $V_{OUT} = V^+/2$ ,  $T_J = 25^\circ C$ , unless otherwise noted




TL/H/9226-9

## Typical Performance Characteristics (Comparators)






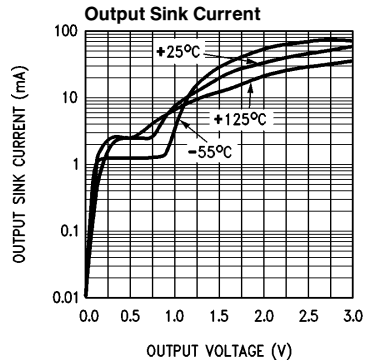


TL/H/9226-10


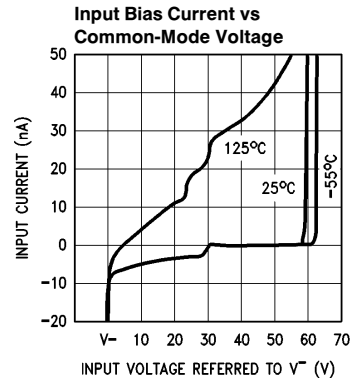


TL/H/9226-11





## Typical Performance Characteristics (Comparators) (Continued)

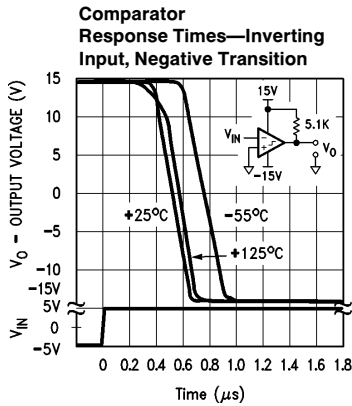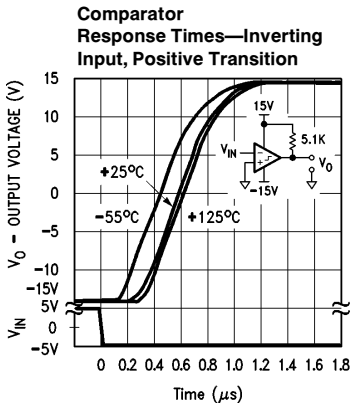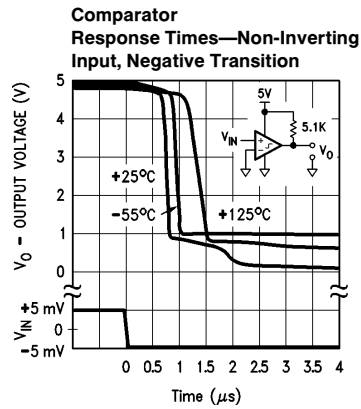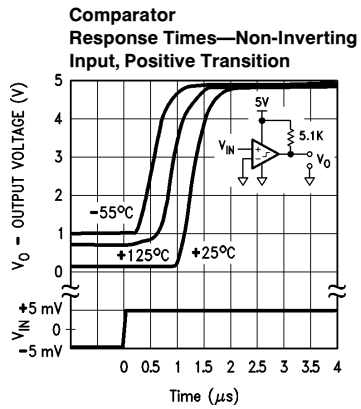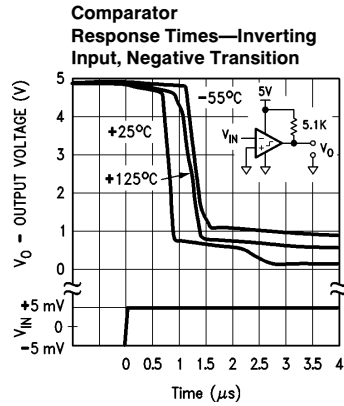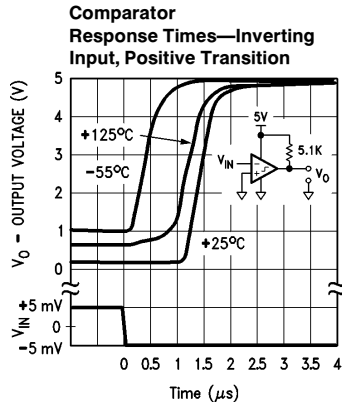


## Typical Performance Characteristics (Comparators) (Continued)

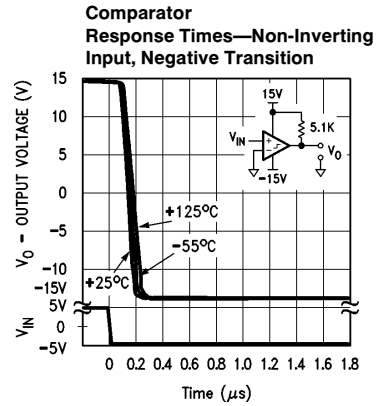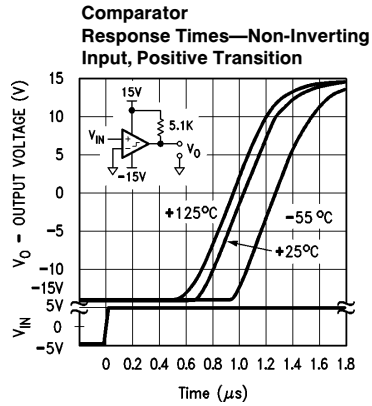


## Typical Performance Distributions

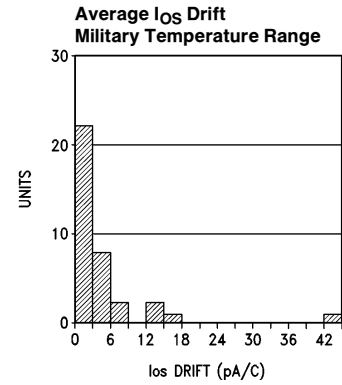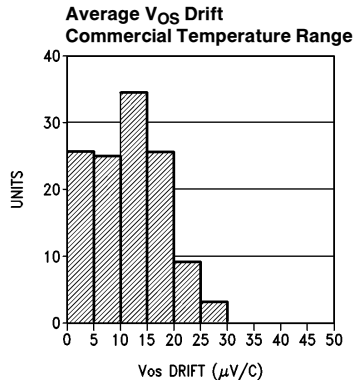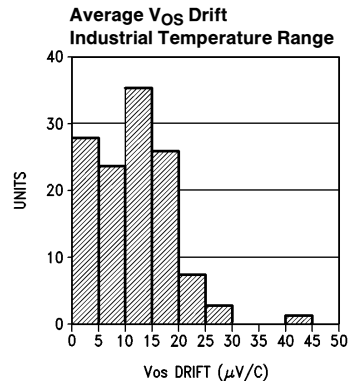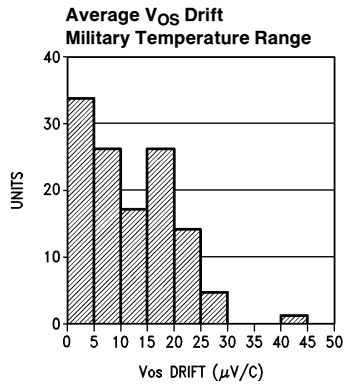


## Typical Performance Distributions (Continued)

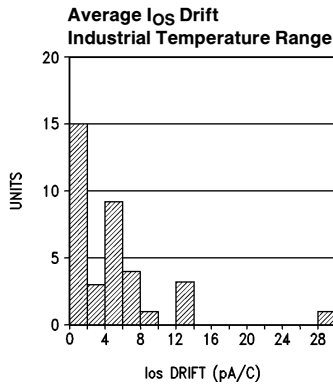


TL/H/9226-24

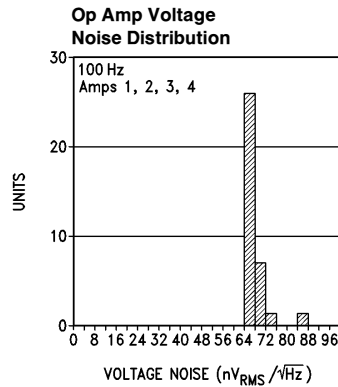


TL/H/9226-27

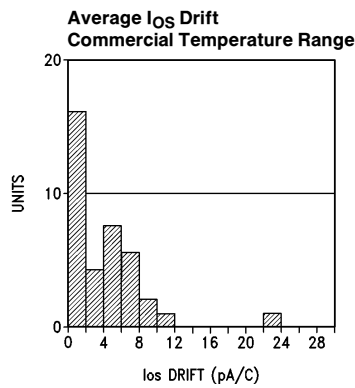

TL/H/9226-25

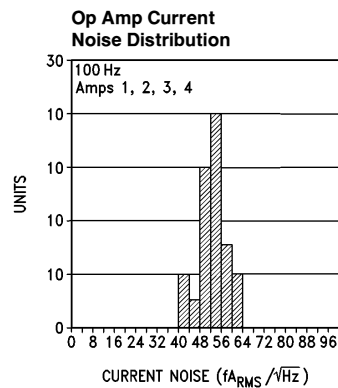

TL/H/9226-28

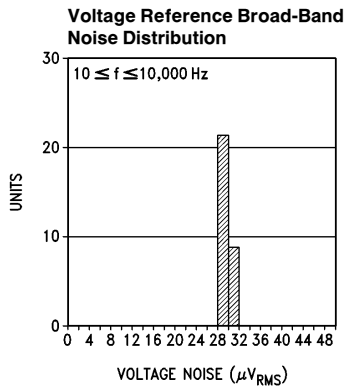


TL/H/9226-26

## Application Information

### VOLTAGE REFERENCE

#### Reference Biasing

The voltage reference is of a shunt regulator topology that models as a simple zener diode. With current  $I_r$  flowing in the "forward" direction there is the familiar diode transfer function.  $I_r$  flowing in the reverse direction forces the reference voltage to be developed from cathode to anode. The cathode may swing from a diode drop below  $V^-$  to the reference voltage or to the avalanche voltage of the parallel protection diode, nominally 7V. A 6.3V reference with  $V^+ = 3V$  is allowed.




TL/H/9226-29

**FIGURE 1. Voltage Associated with Reference  
(current source  $I_r$  is external)**

## Application Information (Continued)


The reference equivalent circuit reveals how  $V_r$  is held at the constant 1.2V by feedback, and how the FEEDBACK pin passes little current.

To generate the required reverse current, typically a resistor is connected from a supply voltage higher than the reference voltage. Varying that voltage, and so varying  $I_r$ , has small effect with the equivalent series resistance of less than an ohm at the higher currents. Alternatively, an active current source, such as the LM134 series, may generate  $I_r$ .



TL/H/9226-30

FIGURE 2. Reference Equivalent Circuit




TL/H/9226-31

FIGURE 3. 1.2V Reference

Capacitors in parallel with the reference are allowed. See the Reference AC Stability Range typical curve for capacitance values—from 20  $\mu\text{A}$  to 3 mA any capacitor value is stable. With the reference's wide stability range with resistive and capacitive loads, a wide range of RC filter values will perform noise filtering.


### Adjustable Reference

The FEEDBACK pin allows the reference output voltage,  $V_{ro}$ , to vary from 1.24V to 6.3V. The reference attempts to hold  $V_r$  at 1.24V. If  $V_r$  is above 1.24V, the reference will conduct current from Cathode to Anode; FEEDBACK current always remains low. If FEEDBACK is connected to Anode, then  $V_{ro} = V_r = 1.24\text{V}$ . For higher voltages FEEDBACK is held at a constant voltage above Anode—say 3.76V for  $V_{ro} = 5\text{V}$ . Connecting a resistor across the constant  $V_r$  generates a current  $I = R1/V_r$  flowing from Cathode into FEEDBACK node. A Thevenin equivalent 3.76V is generated from FEEDBACK to Anode with  $R2 = 3.76/I$ . Keep  $I$  greater than one thousand times larger than FEEDBACK bias current for  $<0.1\%$  error— $I \geq 32 \mu\text{A}$  for the military grade over the military temperature range ( $I \geq 5.5 \mu\text{A}$  for a 1% untrimmed error for a commercial part).



TL/H/9226-32

FIGURE 4. Thevenin Equivalent of Reference with 5V Output




TL/H/9226-33

$$R1 = Vr/I = 1.24/32\mu = 39k$$

$$R2 = R1 \{ (Vro/Vr) - 1 \} = 39k \{ (5/1.24) - 1 \} = 118k$$


FIGURE 5. Resistors R1 and R2 Program Reference Output Voltage to be 5V

Understanding that  $V_r$  is fixed and that voltage sources, resistors, and capacitors may be tied to the FEEDBACK pin, a range of  $V_r$  temperature coefficients may be synthesized.



TL/H/9226-34


FIGURE 6. Output Voltage has Negative Temperature Coefficient (TC) if R2 has Negative TC



TL/H/9226-35

FIGURE 7. Output Voltage has Positive TC if R1 has Negative TC


## Application Information (Continued)



TL/H/9226-36

**FIGURE 8. Diode in Series with R1 Causes Voltage Across R1 and R2 to be Proportional to Absolute Temperature (PTAT)**


Connecting a resistor across Cathode-to-FEEDBACK creates a 0 TC current source, but a range of TCs may be synthesized.



TL/H/9226-37


$$I = V_r/R1 = 1.24/R1$$

**FIGURE 9. Current Source is Programmed by R1**



TL/H/9226-38

**FIGURE 10. Proportional-to-Absolute-Temperature Current Source**



TL/H/9226-39

**FIGURE 11. Negative-TC Current Source**

### Reference Hysteresis

The reference voltage depends, slightly, on the thermal history of the die. Competitive micro-power products vary—always check the data sheet for any given device. Do not assume that no specification means no hysteresis.

### OPERATIONAL AMPLIFIERS AND COMPARATORS

Any amp, comparator, or the reference may be biased in any way with no effect on the other sections of the LM613, except when a substrate diode conducts (see Electrical Characteristics Note 1). For example, one amp input may be outside the common-mode range, another amp may be operating as a comparator, and all other sections may have all terminals floating with no effect on the others. Tying inverting input to output and non-inverting input to  $V^-$  on unused amps is preferred. Unused comparators should have non-inverting input and output tied to  $V^+$ , and inverting input tied to  $V^-$ . Choosing operating points that cause oscillation, such as driving too large a capacitive load, is best avoided.

### Op Amp Output Stage

These op amps, like the LM124 series, have flexible and relatively wide-swing output stages. There are simple rules to optimize output swing, reduce cross-over distortion, and optimize capacitive drive capability:

- 1) Output Swing: Unloaded, the  $42 \mu\text{A}$  pull-down will bring the output within 300 mV of  $V^-$  over the military temperature range. If more than  $42 \mu\text{A}$  is required, a resistor from output to  $V^-$  will help. Swing across any load may be improved slightly if the load can be tied to  $V^+$ , at the cost of poorer sinking open-loop voltage gain.
- 2) Cross-Over Distortion: The LM613 has lower cross-over distortion (a  $1 V_{BE}$  deadband versus  $3 V_{BE}$  for the LM124), and increased slew rate as shown in the characteristic curves. A resistor pull-up or pull-down will force class-A operation with only the PNP or NPN output transistor conducting, eliminating cross-over distortion.
- 3) Capacitive Drive: Limited by the output pole caused by the output resistance driving capacitive loads, a pull-down resistor conducting 1 mA or more reduces the output stage NPN  $r_e$  until the output resistance is that of the current limit  $25\Omega$ . 200 pF may then be driven without oscillation.

### Comparator Output Stage

The comparators, like the LM139 series, have open-collector output stages. A pull-up resistor must be added from each output pin to a positive voltage for the output transistor to switch properly. When the output transistor is OFF, the output voltage will be this external positive voltage.

For the output voltage to be under the TTL-low voltage threshold when the output transistor is ON, the output current must be less than 8 mA (over temperature). This impacts the minimum value of pull-up resistor.

The offset voltage may increase when the output voltage is low and the output current is less than  $30 \mu\text{A}$ . Thus, for best accuracy, the pull-up resistor value should be low enough to allow the output transistor to sink more than  $30 \mu\text{A}$ .

### Op Amp and Comparator Input Stage

The lateral PNP input transistors, unlike those of most op amps, have  $BV_{EBO}$  equal to the absolute maximum supply voltage. Also, they have no diode clamps to the positive supply nor across the inputs. These features make the inputs look like high impedances to input sources producing large differential and common-mode voltages.

## Typical Applications

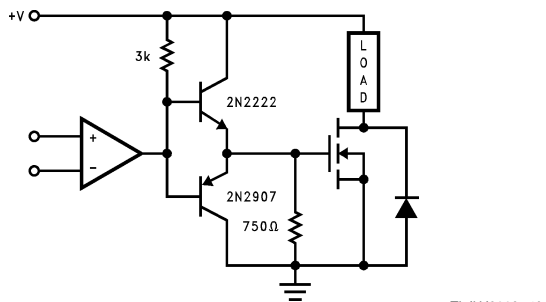


FIGURE 12. High Current, High Voltage Switch

TL/H/9226-40

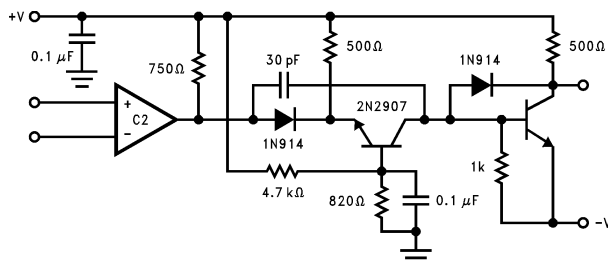


FIGURE 13. High Speed Level Shifter. Response time is approximately 1.5  $\mu$ s, where output is either approximately +V or -V.

TL/H/9226-41

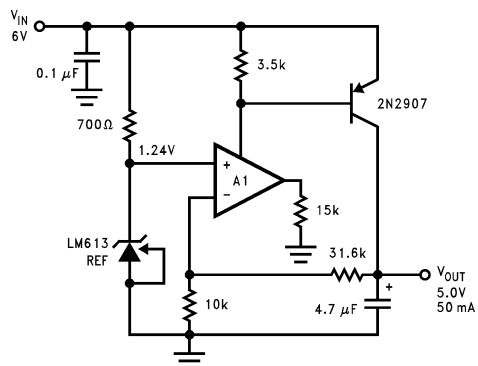


FIGURE 14. Low Voltage Regulator. Dropout voltage is approximately 0.2V.

TL/H/9226-42


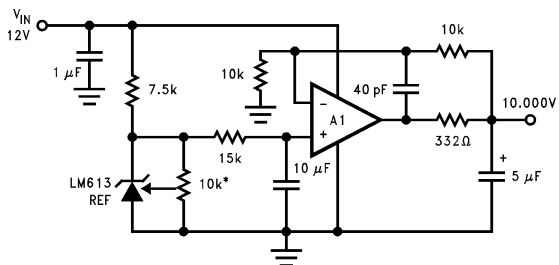


FIGURE 15. Ultra Low Noise, 10.00V Reference. Total output noise is typically 14  $\mu$ V<sub>RMS</sub>.

\*10k must be low  
t.c. trimpot


TL/H/9226-43

## Typical Applications (Continued)




TL/H/9226-44

FIGURE 16. Basic Comparator




TL/H/9226-45

FIGURE 17. Basic Comparator with External Strobe

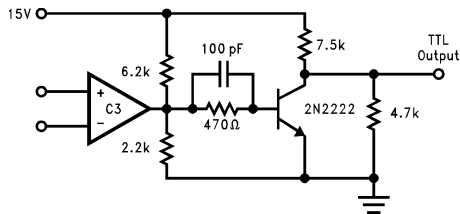

TL/H/9226-46


FIGURE 18. Wide-Input Range Comparator with TTL Output



TL/H/9226-47

FIGURE 19. Comparator with Hysteresis ( $\Delta V_H = +V(1k/1M)$ )

## Physical Dimensions inches (millimeters)

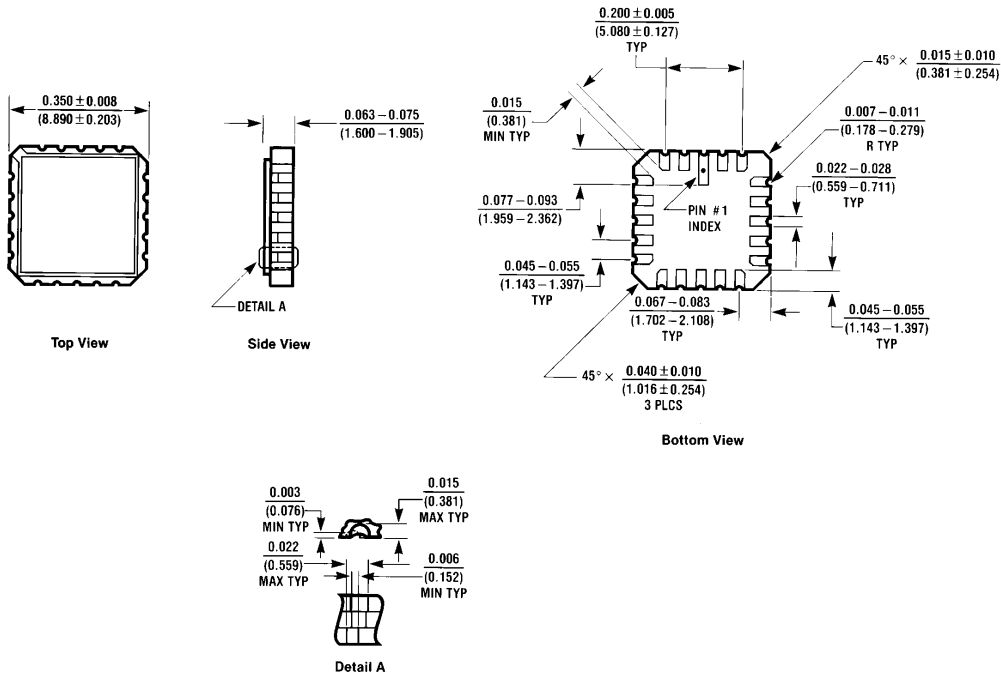


20-Lead Small Outline Package (E)  
Order Number LM613AME/883  
NS Package Number E20A


E20A (REV. D)



**Physical Dimensions** inches (millimeters) (Continued)

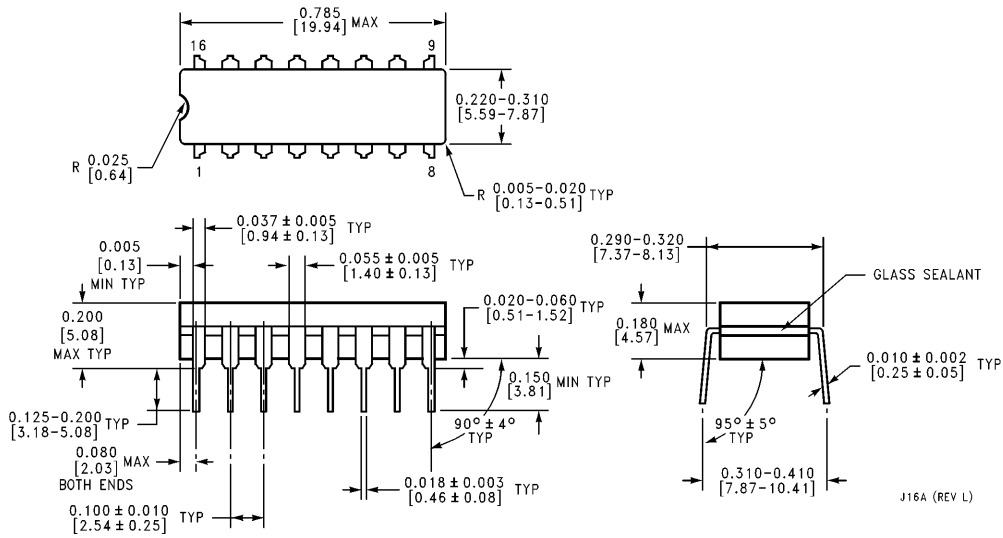


**16-Lead Ceramic Dual-In-Line Package (J)**  
**Order Number LM613AMJ/883**  
**NS Package Number J16A**

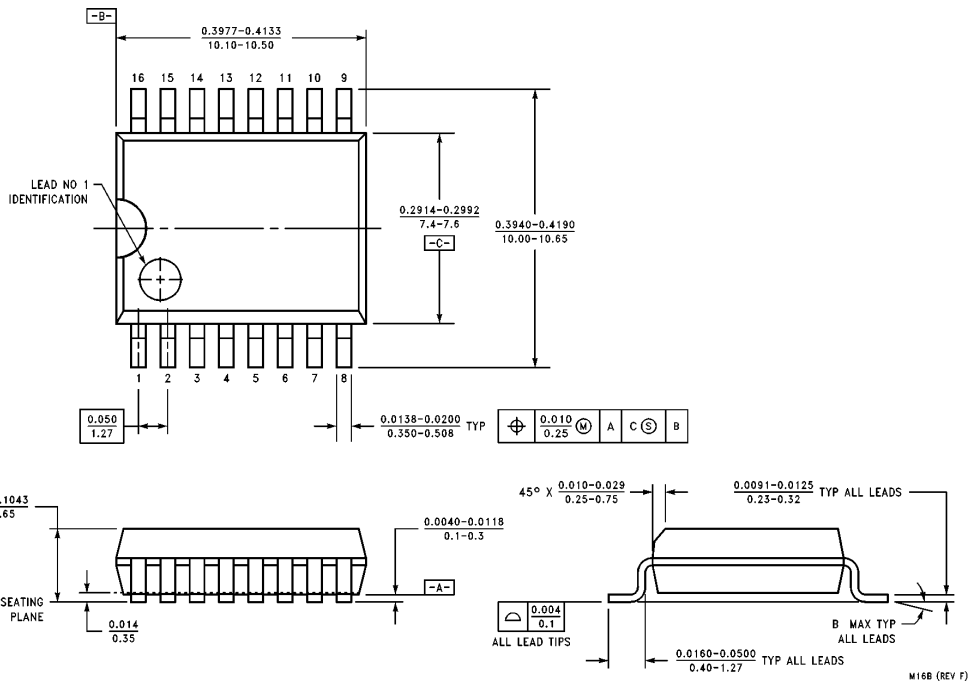

**16-Lead Small Outline Package (WM)**  
**Order Number LM613IWM**  
**NS Package Number M16B**

**Physical Dimensions** inches (millimeters) (Continued)

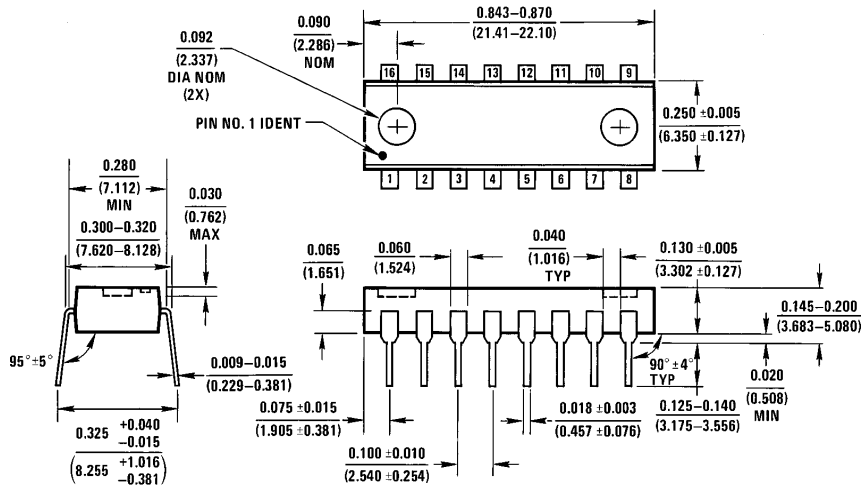

N16A (REV E)

**16-Lead Molded Dual-In-Line Package (N)**  
 Order Number LM613CN, LM613AIN, LM613IN, LM613AMN or LM613MN  
 NS Package Number N16A

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
 1111 West Bardin Road  
 Arlington, TX 76017  
 Tel: 1(800) 272-9959  
 Fax: 1(800) 737-7018

**National Semiconductor Europe**  
 Fax: (+49) 0-180-530 85 86  
 Email: cnjwge@tevm2.nsc.com  
 Deutsch Tel: (+49) 0-180-530 85 85  
 English Tel: (+49) 0-180-532 78 32  
 Français Tel: (+49) 0-180-532 93 58  
 Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
 19th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: (852) 2737-1600  
 Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
 Tel: 81-043-299-2309  
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.